




ENGINEERED TURF PRODUCTS



SCAN FOR  
WEBSITE



## HEATMAXX® 65

### KEY FEATURES

- The only turf warranted against reflective burns and melting from Low-E windows
- Melt-proof up to 460 degrees with class A rating
- ASTM E180 for rooftop use, without infill
- Our Nylon products have passed the rigorous ASTM E85 testing, allowing them to be used indoors + out
- 100% Nylon yarns - Deliveries superior performance
- Certified by the ASTM D2859 & ASTM E84 Federal flammability Standard.



HEAT MAXX

### RECOMMENDED APPLICATIONS



### FOOT TRAFFIC




### PRODUCT SPECIFICATIONS

YARN TYPE:	NYLON
YARN COLOR:	VERDE & LIME GREEN
THATCH COLOR:	VERDE GREEN TAN
WEIGHT:	65 OZ/SY
PILE HEIGHT:	1-5/8"
BACKING:	BLACK URETHANE
WARRANTY:	15 YEAR PRO RATED WARRANTY

844.368.4765 | [WWW.GOGREENSYNTURF.COM](http://WWW.GOGREENSYNTURF.COM)



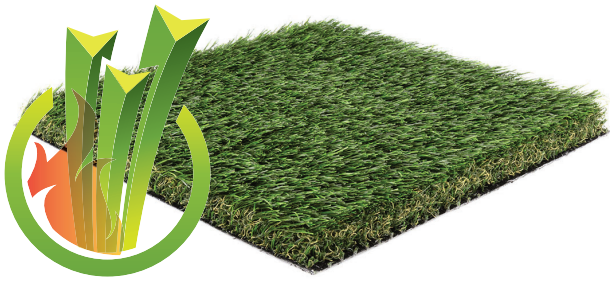

# GO GREEN

ENGINEERED TURF PRODUCTS

## HEATMAXX® 65

AATCC 134 - ANTI-STATIC	PASS
ASTM C1028 - STATIC/FRICTION	PASS
ASTM D1335 - TUFT BIND	16.5 LB
ASTM F2765 - LEAD LEVELS	<0.01 PPM
ASTM D2859 - FLAMMABILITY (PILL TEST)	PASS
ASTM E648 - FLAMMABILITY (CRITICAL RADIANT FLUX)	PASS
ASTM 5034 - GRAB TEAR STRENGTH	PASS
ASTM F1951 - ADA WHEELCHAIR	COMPLIANT
ASTM F1551 - WATER PERMEABILITY	>500 IN/HR
ASTM E108 - FIRE TEST (ROOF DECKS)	CLASS A
ASTM E84 - SURFACE FLAMMABILITY/SMOKE DENSITY	CLASS C
ASTM 1292 - IMPACT ATTENUATION	PASS



HEAT MAXX