

TEST REPORT

DATE: 08-30-2023

Page 1 of 2

TEST NUMBER: 0405400

CLIENT	Go Green - Turf Evolutions
---------------	----------------------------

TEST CONDUCTED	ASTM F1292 Specification for Impact Attenuation of Surface Systems Under and Around Playground Equipment
-----------------------	--

DESCRIPTION OF PRODUCT TESTED	PETMAXX 90 Turf with 4.0 lbs/foot sand infill
--------------------------------------	---

REFERENCE	PO #17078
------------------	-----------



GENERAL PRINCIPLE

A test specimen is prepared using the commissioner's installation instructions by applying a seam through the middle of the surface material. The material is groomed and infilled as recommended. Each panel for testing is acclimated for a minimum of 24 hours in each respective condition. NIST Traceable temperature sensors are inserted into the sample to ensure the correct temperature is achieved through the matrix. Testing is commenced within one minute of removal from the acclimation chambers. The specimen is impacted at a specified velocity with a missile of given mass of 10.1 lbs and geometry. A transducer mounted in the missile monitors the acceleration time history of the impact, which is recorded with the aid of an oscilloscope or other recording device. The head-form was dropped at the requested height. The GMAX values, HIC (head impact criteria) are recorded for three drops. The second and third drops are averaged. Testing was conducted at three temperatures as listed on the results. The maximum criterion for passing a specified drop height is 200 gmax or 1,000 HIC.

Equipment	Accelerometer Calibration	Accelerometer Manufacturer and Type	Laboratory Conditions
GC Fall-tech	3-28-23	PCB Model 356B20	70° F and 50% RH
Date Received	Specimen Size Tested	Infill Total Weight	Infill Type
8-21-23	4 square feet	16.0 lbs	Sand
Date Tested	Pile Height of Turf	Requested By:	Technician
8-23-23	2.0 inch	Ashley Gribble	Matt Asbury

APPROVED BY: *Matt Asbury*

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. This report applies only to those samples tested and is not necessarily indicative of apparently identical or similar products. This report, or the name of Professional Testing Laboratory Inc. shall not be used under any circumstance in advertising to the general public.

TEST REPORT

DATE: 08-30-2023

Page 2 of 2

TEST NUMBER: 0405400


CLIENT: Go Green - Turf Evolutions

TEST CONDUCTED: ASTM F1292 Specification for Impact Attenuation of Surface Systems Under and Around Playground Equipment

TEST RESULTS

Tested Dry at 72° F	DROP 1	DROP 2	DROP 3	AVERAGE OF DROPS 2 AND 3
GMAX	189	197	201	199
HIC	892	938	911	925

* Specimen subjected to a theoretical drop height of 4.5 feet. (actual drop height: 52.5 inches at 18.07 ft/sec)

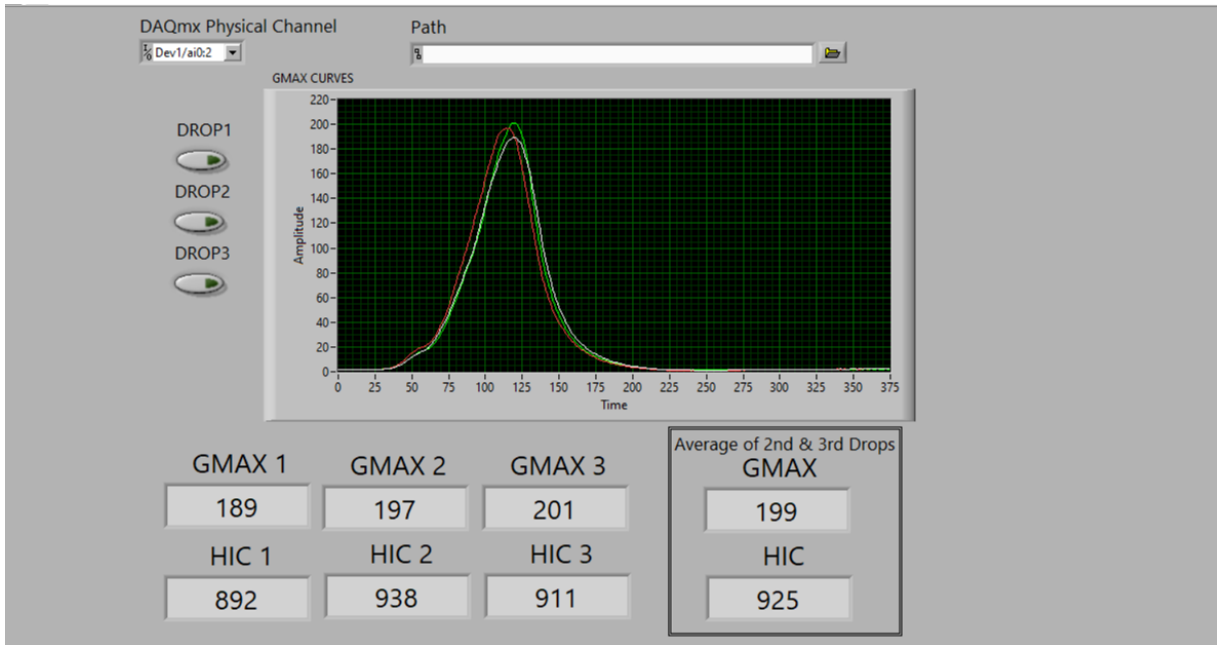

COMMENTS

“The results reported herein reflect the performance of the described samples at the time of testing and at the temperature(s) reported. The results are specific to the described samples. Samples of surfacing materials that do not closely match the described samples will perform differently”.

APPROVED BY: *Gary Anthony*

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. This report applies only to those samples tested and is not necessarily indicative of apparently identical or similar products. This report, or the name of Professional Testing Laboratory Inc. shall not be used under any circumstance in advertising to the general public.